

WARNING: DISCONNECT POWER AT THE MAIN FUSE BOX BEFORE INSTALLATION.

WARNING:

This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended.

Before assembly, remove all parts and part packages from box. If anything is missing, please contact the retailer from which the product was purchased.


elk HOME

ANY QUESTIONS CALL: 800-613-3261
M-F 8:00AM-6:00PM ET


ITEM#: D4665

1. Carefully pull house wires down out of junction box so house wires are easily accessed to connect fixture wires.
2. Position mounting bracket (A) so fixture mounting screws (E) attached to mounting bracket (A) are pointing down towards floor.
3. Carefully pull the house wires through hole in center of the mounting bracket (A).
4. Align holes in the mounting bracket (A) with holes in junction box.
5. Thread each junction box screw (B) into appropriate holes in mounting bracket (A) and into holes in junction box. Tighten junction box screws (B) to attach mounting bracket (A) to junction box.


CAUTION: Make sure house wires are still easily accessible.
DO NOT pinch wires between mounting bracket and ceiling.

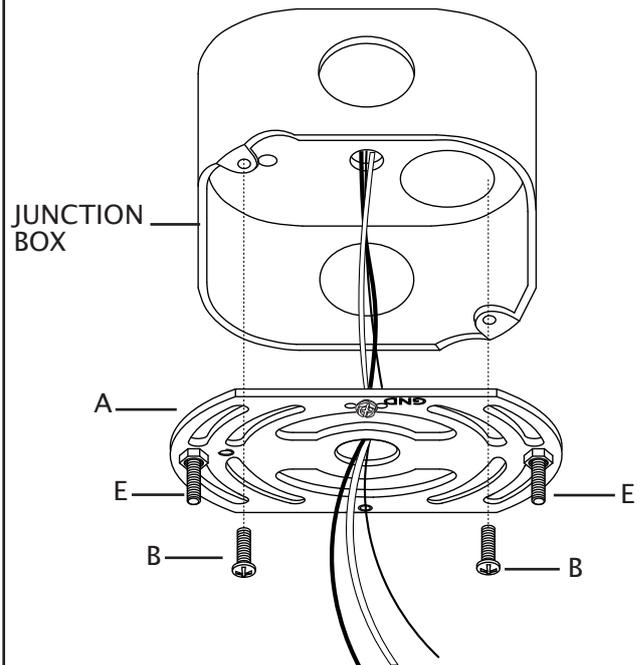

6. Hold one center stem (L) so loop is at the top. On side of fixture with fixture wires, carefully push fixture wires up through bottom of center stem (L). Pull fixture wires out of the top of center stem (L). Pull fixture wires taut.
7. Screw center stem (L) onto top of fixture body (O).
8. Attach one locking link (G) to loop on top of center stem (L).
9. Hold one center stem (L) so loop is at the top. On side of fixture without the fixture wires, screw bottom of center stem (L) on top of fixture body.
10. Attach one locking link (G) to loop on top of center stem (L).
11. Determine desired hanging height of fixture. Remove chain links (H) to achieve desired height. **CAUTION:** Make sure chains are the same length.
12. On side of fixture with fixture wires, attach chain link at end of one chain section (H) to locking link (G) on loop on top of center stem (L). Attach one locking link (G) to last chain link on section of chain (H).
13. Weave fixture wires through chain links, skipping every other chain link.
14. Position canopy (D) so small loops on canopy (D) are pointing down towards fixture.
15. Carefully push fixture wires up through hole in center of one small loop on canopy (D). Pull fixture up through canopy (D).
16. Attach locking link (G) at end of section of chain (H) to small loop on canopy (D).
17. On side of fixture without fixture wires, attach chain link at end of section of chain (H) onto locking link (G) on loop on top of center stem (L).
18. Attach locking link (G) to last link on section of chain (H) and onto small loop on canopy (D).

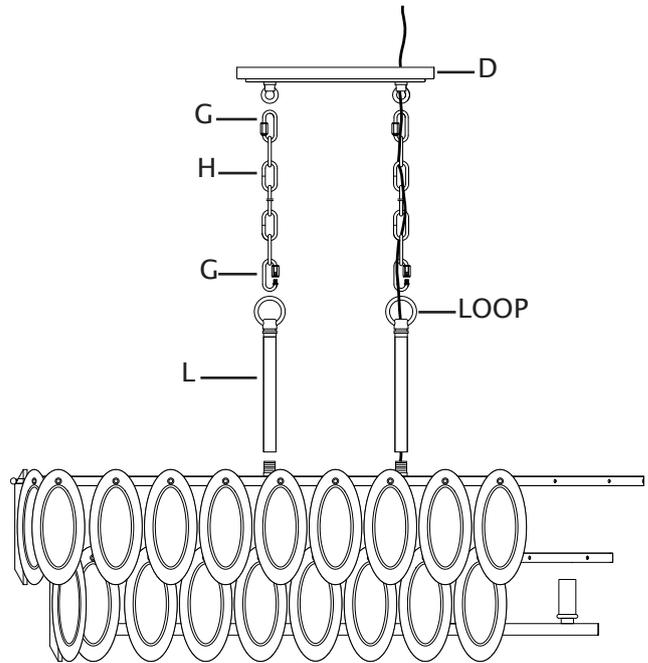

19. Strip 3/4" of insulation from ends of fixture wires.
20. Slightly loosen ground screw on mounting bracket (A). Do not completely remove ground screw. Wrap ground wire (copper) from junction box around ground screw, leaving enough ground wire to attach to fixture ground wire. Twist end of fixture ground wire and end of house ground wire (copper) together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Reference chart below for correct wire connections.

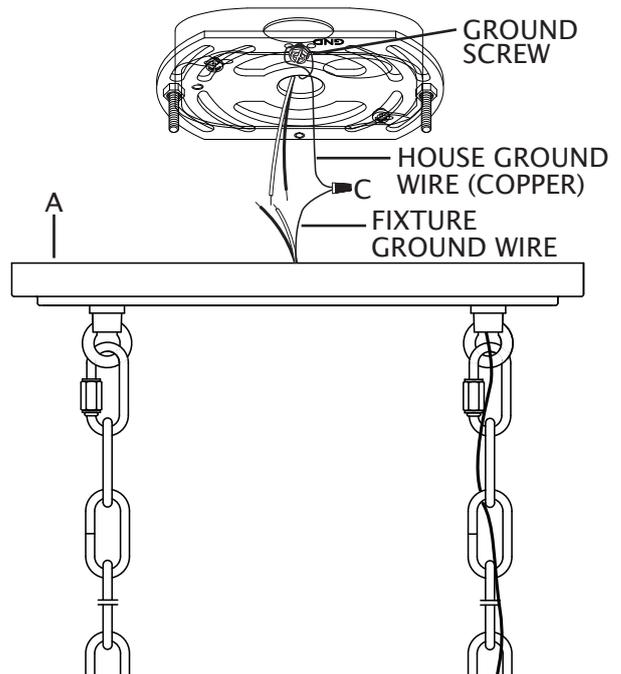


Connect Supply (House) Ground Copper Wire to:
Bare Copper Wire or,
Bare Silver Wire or,
Green Insulated Wire.

21. Twist end of house lead wire (black) and end of fixture lead wire together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Twist end of house neutral wire (white) and end of fixture neutral wire together. Twist wire nut (C) onto ends of wires. Completely tighten wire nut (C). Reference chart to the right for correct wire connections.
22. Wrap electrical tape (not included) around wire nuts (C) and wires. Ensure wires are securely fastened into wire nuts.
23. Carefully push all wires and wire nuts into junction box.

Connect Black Lead Supply (House) Wire to:	Connect White Neutral Supply (House) Wire to:
Black Wire or,	White Wire or,
*Parallel Cord (Round and Smooth) or,	*Parallel Cord (Square and Ridged) or,
No printed words on wire insulation or,	Printed words on wire insulation or,
Insulated Wire (other than green) with Copper Conductor.	Insulated Wire (other than green) with Silver Conductor.

*When parallel wire (SPT 1 & SPT 2) is used:
The lead wire is round in shape or smooth.
The neutral wire is square in shape or ridged.

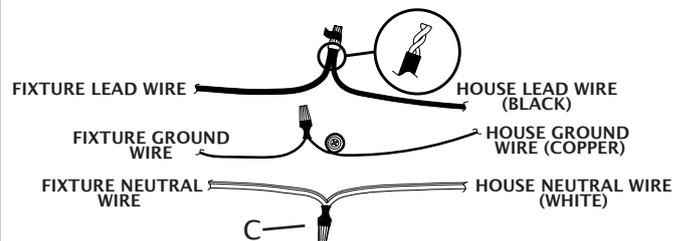

24. Carefully raise fixture up to ceiling. Pass holes in canopy (D) over ends of fixture mounting screws (E) on mounting bracket (A).
25. Screw one threaded cap (F) onto each fixture mounting screw (E). Tighten threaded caps (F) to secure fixture to ceiling.
26. Screw recommended bulbs (E12 Candelabra bulb type, not included) into sockets. Verify correct bulb wattage marked on socket of fixture. **WARNING: DO NOT** exceed maximum bulb wattage.
27. Hold one glass oval trim (S) so the bevel is pointing out. Place back of one glass oval trim (S) up against edge of bottom ring on fixture body. Align hole in top of glass oval trim (S) with hole in edge of small ring.
28. Thread one thumbscrew (R) into hole in glass oval trim (S) and into hole in bottom ring. Tighten thumbscrew (R) to secure glass oval trim (S) in place. **DO NOT** over tighten.
29. Repeat steps 27–28 to install remaining glass oval trim pieces (S) on bottom ring.
30. After all glass oval trim pieces (S) have been installed on bottom ring, attach the remaining glass oval trim pieces (S) in the same manner on the top ring.

