

Each Norwell light fixture has a mounting bar or plate to secure it to the electrical junction box. No matter what type of mounting bar/plate your fixture uses, installation requires three basic steps.


Norwell Lighting INSTRUCTIONS

1265 & 1266

1. Attach the mounting bar/plate to the electrical junction box.
2. Connect the electrical wires from the junction box to the electrical wires from the fixture.
(Black to Black, White to White and Green to Ground)
3. Secure the fixture to the mounting bar/plate.

INSTALLATION OF FIXTURE

- 1) PULL THE ELECTRICAL WIRES FROM THE J-BOX THROUGH THE CENTER HOLE IN CROSSBAR.
- 2) ATTACH CROSSBAR TO J-BOX WITH 2 SCREWS.
- 3) CONNECT THE ELECTRICAL WIRES FROM YOUR J-BOX TO THE WIRES FROM THE FRAME USING WIRE NUTS. (BLACK TO BLACK, WHITE TO WHITE, GREEN TO GROUND)
- 4) ATTACH THE FRAME TO THE CROSSBAR, USING THE (2) MOUNTING SCREWS. ENSURE THE FRAME IS SNUG TO THE WALL.
- 5) RAISE THE FLAT PLATE AND GLASS OVER THE SOCKET INTO THE FRAME. LOCK IN PLACE WITH SOCKET RING.
- 6) LAMP FIXTURE WITH THE REQUIRED NUMBER OF LAMPS AND WATTAGE PER FIXTURE. LAMPS SOLD SEPARATELY.

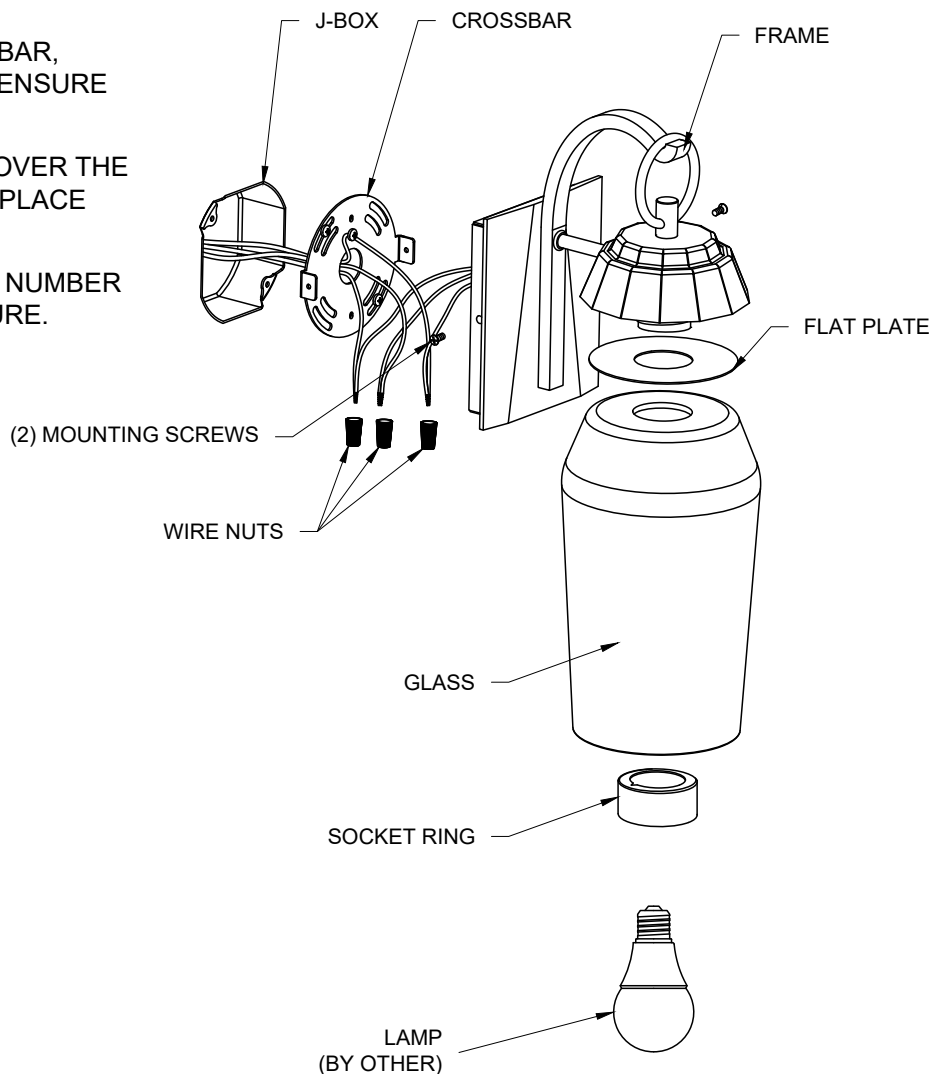

- Be sure to read and understand all instruction sheets completely before beginning assembly or installation.
- Be sure the power is turned off by either by removing the fuse or closing the circuit breaker.
- All assembly and installation work must be in accordance with National, State and Local electrical codes. We strongly advise using a licensed electrician.
- Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your site. In all cases, it is the responsibility of the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture.
- Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installed appearance or reduce function or performance.