




1. FIXTURE TO BE CLEAN AND FREE OF DENTS, SCRATCHES, LACQUER OR PAINT RUNS AND LACQUER BREAKDOWN. ALL JOINTS ARE TO BE NEAT AND TIGHT FITTING.
2. ALL CONSTRUCTION RELATING TO SHAPE, APPEARANCE, AND/OR PROPORTION MUST MATCH ASSEMBLY DRAWING AND SPECIFICATIONS.
3. ALL CONSTRUCTION AND WIRES MUST CONFORM TO UL STANDARDS.
4. A REFERENCE DIMENSION (X.XX) IS A DIMENSION WITHOUT TOLERANCE AND IS USED FOR INFORMATION PURPOSES ONLY.
5. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE NOTED.
6. ALL DIMENSIONS SHOWN ACROSS A CENTERLINE SHALL BE CENTRALIZED WITHIN ONE HALF THEIR TOTAL TOLERANCE.
7. ALL HOLES WHERE WIRES PASS MUST BE FREE OF BURRS AND SHARP EDGES.
8. ALL THREADS ON NIPPLES, TUBES, AND HEX NUTS MUST BE 1/8-27 IN NPSM (AMERICAN STANDARD STRAIGHT PIPE THREADS) UNLESS OTHERWISE NOTED.
9. ALL BRASS SUPPORTING PARTS TO BE 0.032" MIN. THICKNESS BEFORE FORMING UNLESS OTHERWISE NOTED. ALL STEEL SUPPORTING PARTS TO BE 0.022" MIN. THICKNESS BEFORE FORMING. ALL OTHER NON-SUPPORTING PARTS MAY BE OF LESSER THICKNESS.
10. ALL WIRE LEADS AND SOCKETS MUST BE UL AND C.S.A. LISTED. SUPPLIER MUST VERIFY UL AND C.S.A. LISTINGS.
11. ALL WIRE LEADS MUST BE 18 GAUGE, 150 DEG C.
12. GROUND WIRE TO BE 18 GAUGE (16 STRANDS #30 AWG.) INSULATED. INSULATION COLOR TO BE EITHER GREEN, OR GREEN W/ Y STRIPE, OR GREEN W/ Y TRACER. STRIPE WIRE, INDIVIDUAL STRANDS TO BE TINNED.
13. GROUND WIRE TO BE ATTACHED BY MEANS OF A TERMINAL RING.
14. WIRE LEADS AND GROUND WIRE MUST EXTEND 152 MM (6") PAST CANOPY. NEUTRAL LEAD TO HAVE WHITE INSULATION LINE LEAD TO HAVE BLACK INSULATION.
15. INSTRUCTION SHEETS, AND CARTON LABEL, FURNISHED BY SUPPLIER. ARTWORK FURNISHED BY PC/LNA.
16. FIXTURE TO BE COMPLETELY WIRED, ASSEMBLED AND PACKAGED IN A REUSABLE SHIPPING WHITE CARTON.
17. FINISH AND COLOR ON ALL FIXTURES MUST BE CONSISTENT, AND MUST NOT VARY FROM FIXTURE TO FIXTURE. IF FIXTURE HAS A BANNED GLASS CAGE IT MUST COMPLY WITH PC/LNA QUALITY STANDARD "G-1".
18. GLASS SHADES ARE TO BE FREE OF ANY GREEN TINT, FRACTURES, SCRATCHES, OYSTERING AT EDGES, LACQUER OR PAINT.
19. LACQUER FINISH MUST WITHSTAND A MINIMUM OF 600 HOURS OF Q.L.V. TESTING WITHOUT BREAKDOWN OF FINISH. VENDOR TO VERIFY TEST.
20. FIXTURES MUST BE USC-UL LISTED AND SUPPLIER MUST PROVIDE PC/LNA WITH COPIES OF ALL TEST REPORTS, PROCEDURES, AND FIXTURE DESCRIPTIONS.
21. NO CHANGE SHALL BE ALLOWED ON PRODUCT MATERIAL REGARDLESS OF WHETHER SUCH CHANGE EFFECTS REQUIREMENTS SPECIFIED, WITHOUT PRIOR WRITTEN APPROVAL FROM PC/LNA, ELON, IL USA.
22. IT IS THE SUPPLIER'S RESPONSIBILITY TO SUPPLY A CERTIFICATE OF COMPLIANCE (COC) CERTIFYING THAT THE MATERIALS AND FINISHES USED IN THE PART MEET THE PRINT REQUIREMENTS. THE SUPPLIER WILL FURNISH PC/LNA WITH A COC UPON REQUEST.
23. PRIOR TO SHIPMENT, THE SUPPLIER IS TO FULLY ASSEMBLE FIXTURE, MOUNT TO U.S.A. JUNCTION BOX, AND TEST ONE OF EACH STYLE FIXTURE TO VERIFY THAT CONSTRUCTION MATCHES ASSEMBLY DRAWING AND VERIFY OVERALL FIT, FINISH AND COLOR.
24. THE SUPPLIER TO DEVELOP PACKING BOX. PACKAGING MUST BE ABLE TO PASS USA NETA DROP TEST REQUIREMENT. SUPPLIER TO TEST PRODUCT PRIOR TO PRODUCTION SHIPMENTS TO ENSURE COMPLIANCE.

| REVISIONS |     |                          |             |          |
|-----------|-----|--------------------------|-------------|----------|
| ZONE      | REV | DESCRIPTION              | DATE        | APPROVED |
| N/A       | P1  | RELEASE FOR PROTOTYPE    | 01-JUN-2013 |          |
| N/A       | P2  | CHANGE FOR DOWN          | 19-JUN-2013 |          |
| N/A       | P3  | REVISED FOR GLASS FINISH | 22-SEP-2013 |          |

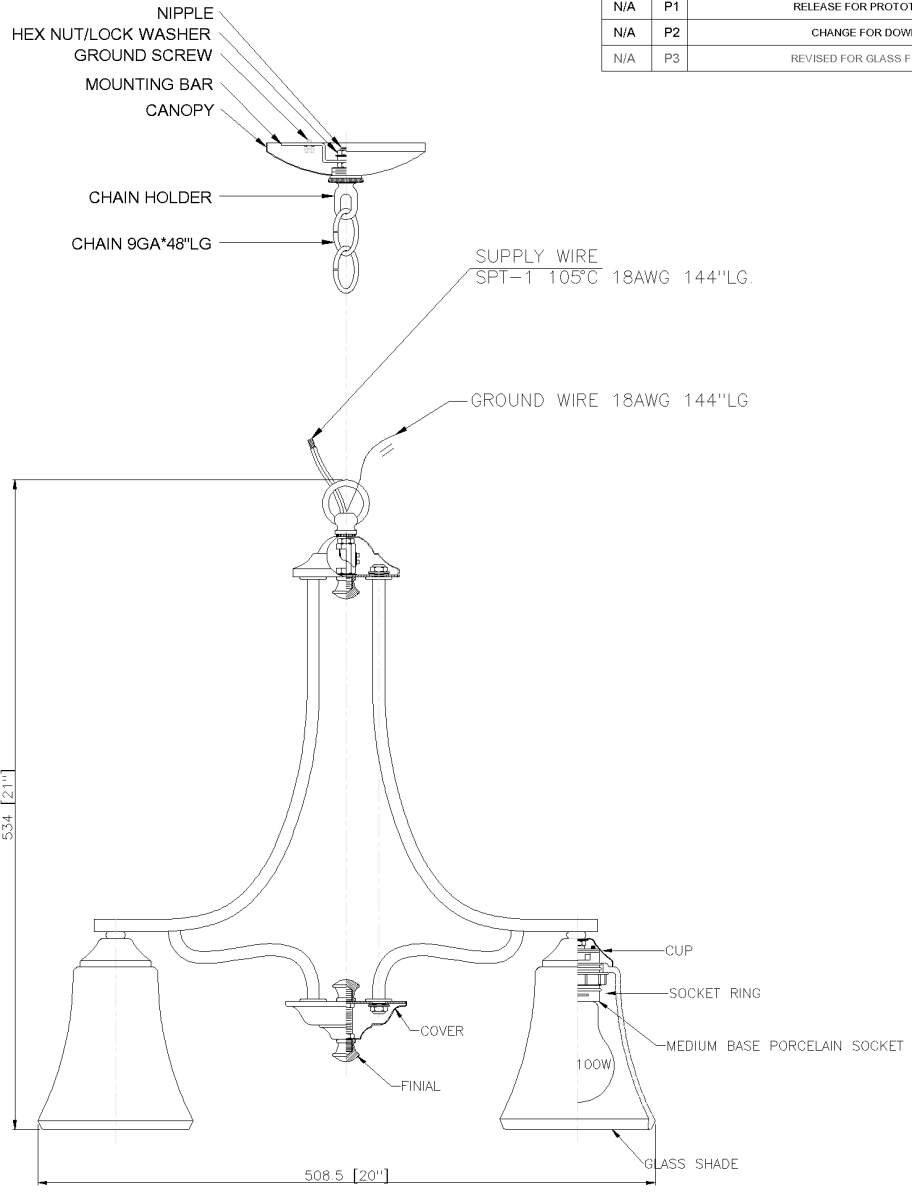

| PART NUMBER  | FINISH         | GLASS                   |
|--------------|----------------|-------------------------|
| Treme 3C 704 | Espresso       | CHAMPAGNE GLASS         |
| Treme 3C 217 | Brushed Nickel | ETCH WHITE INSIDE GLASS |

UNLESS OTHERWISE SPECIFIED TOLERANCE ON

|           |      |      |
|-----------|------|------|
| ONE PLACE | (0)  | 1.0  |
| TWO PLACE | (00) | 0.50 |

ANGULAR COMMERCIAL TOLERANCES APPLY TO STOCK SIZES

THIRD ANGLE PROJECTION

CAD DOCUMENT, MANUAL REVISIONS NOT ALLOWED

**METRIC**

DO NOT SCALE DRAWING. DIMENSIONS ARE IN MILLIMETERS DIMENSIONING AND TOLERANCING PER ANSI Y14.5 - 1982

THE INFORMATION, DRAWING, DESIGN, AND MATERIAL CONTAINED IN THIS DOCUMENT (1) ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRET AND (2) ARE PROVIDED TO YOU UNDER TAKING TO US TO KEEP THEM CONFIDENTIAL AND TO USE THEM ONLY FOR THE PURCHASE PERMITTED BY US. YOUR ACCEPTANCE OF THIS DOCUMENT WILL BE TREATED AS YOUR AGREEMENT TO BE BOUND BY SUCH UNDERTAKINGS.

DESIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_  
 CHECKED BY \_\_\_\_\_ DATE \_\_\_\_\_  
 APPROVED BY \_\_\_\_\_ DATE \_\_\_\_\_

**THOMAS LIGHTING**

TITLE: **Treme 3LT CHANDELIER**

|            |                            |              |
|------------|----------------------------|--------------|
| SIZE: A2   | DWG NO: Treme 3C (TK0019A) | REV: P3      |
| SCALE: N/A | WEIGHT                     | SHEET 1 OF 1 |